

10Gbps 10km Range SFP+ Optical Transceiver

Optical Transceivers

Overview

This 1310 nm Distributed Feedback (DFB) 10Gbps 10km Range SFP+ Optical Transceiver is designed to transmit and receive optical data over singlemode optical fiber with a link length of up to 10km.

The SFP+ 10km module electrical interface is compliant to SFI electrical specifications.

The module provides differential termination and reduce differential to common mode conversion for quality signal termination and low EMI.

The transmitter input and receiver output impedance is 100 Ohms differential.

Data lines are internally AC coupled.

SFI typically operates over 200 mm of improved FR4 material or up to about 150mm of standard FR4 with one connector.

Applications for module are 10GBASE-LR at 10.3125Gbps or other optical links.



Features

- Optical interface compliant to IEEE 802.3ae 10GBASE-LR
- Electrical interface compliant to SFF-8431
- Hot Pluggable
- 1310nm DFB transmitter, PIN photo-detector
- Operating case temperature: 0 to 70 °C
- Low power consumption
- Applicable for 10km SMF connection
- All-metal housing for superior EMI performance
- Advanced firmware allow customer system encryption information to be stored in transceiver
- Cost effective SFP+ solution, enables higher port densities and greater bandwidth
- RoHS6 compliant (lead free)



10Gbps 10km Range SFP+ Optical Transceiver

Optical Transceivers

Absolute Maximum Rating

These values represent the damage threshold of the module. Stress in excess of any of the individual absolute maximum ratings can cause immediate catastrophic damage to the module even if all other parameters are within recommended operating conditions.

Parameter	Symbol	Minimum	Maximum	Unit
Power Supply Voltage	Vcc	0	+3.6	V
Storage Temperature	Tc	-40	+85	°C
Operating Case Temperature	Tc	0	+70	°C
Relative Humidity	RH	5	95	%
RX Input Average Power	Pmax	-	0	dBm

Recommended Operating Environment

Recommended operating environment specifies parameters for which the electrical and optical characteristics hold unless otherwise noted.

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Power Supply Voltage	Vcc	3.135	3.300	3.465	V
Operating Case Temperature	Tc	0	25	70	°C

Low Speed Characteristics

Parameter	Symbol	Minimum	Maximum	Unit
Power Consumption			1	W
TX_Fault,RX_LOS	VOL	0	0.4	V
	VOH	Host_Vcc-0.5	Host_Vcc+0.3	V
TX_DIS	VIL	-0.3	0.8	V
	VIH	2.0	VCCT+0.3	V
RS0,RS1	VIL	-0.3	0.8	V
	VIH	2.0	VCCT+0.3	V

10Gbps 10km Range SFP+ Optical Transceiver

Optical Transceivers

Optical Characteristics

The following optical characteristics are defined over the recommended operating environment unless otherwise specified.

Parameter	Unit	Value
Operating Reach		10k
Transmit		
Center wavelength (range)	nm	1260-1355
Side Mode Suppression Ratio (min)	dB	30
Maximum Launched power	dBm	+0.5
Minimum Launched power	dBm	-8.2
OMA Launched power	dBm	-5.2
OMA TDP (min) Launched power	dBm	-6.2
Transmitter and dispersion penalty	dB	0
Average launch power of OFF transmitter (max)	dBm	-30
Extinction ratio (min)	dB	3.5
RIN12 OMA (max)	dB/Hz	-128
Optical Return Loss Tolerance (min)	dB	12
Receive		
Center wavelength (range)	nm	1260-1355
Receive overload (max) in average power¹	dBm	0.5
Receive sensitivity (min) in average power¹	dBm	-14.4
Receiver sensitivity (max) in OMA	dBm	-12.6
Receiver Reflectance (max)	dB	-12
Stressed receiver sensitivity (max) in OMA²	dBm	-10.3
Vertical eye closure penalty (min)³	dB	2.2
Stressed eye jitter (min)²	Ulp-p	0.7
Receive electrical 3dB upper cutoff frequency (max)	GHz	12.3
Receiver power (damage, Max)	dBm	1.5

Notes:

1. The optical power is launched into SMF
2. Measured with a PRBS 2³¹-1 test pattern@10.3125Gbps
3. Measured with a PRBS 2³¹-1 test pattern@10.3125Gbps BER_≤ 10⁻¹²
4. In G.652 and G.655(NDSF)

10Gbps 10km Range SFP+ Optical Transceiver

Optical Transceivers

Electrical Characteristics

The following electrical characteristics are defined over the recommended operating environment unless otherwise specified.

Parameter	Symbol	Min.	Typical	Max	Unit	Notes
Data Rate		-	10.3125	-	Gbps	
Power Consumption		-	1200	1500	mW	
Transmit						
Single ended Output Voltage Tolerance		-0.3	-	4.0	V	
C Common Mode Voltage Tolerance		15	-	-	mV	
Tx Input Diff Voltage	VI	400		1600	mV	
Tx Fault	VoL	-0.3		0.4	V	At 0.7mA
Data Dependent Input Jitter	DDJ			0.10	UI	
Data Input Total Jitter	TJ			0.28	UI	
Receive						
Single Ended Output Voltage Tolerance		-0.3	-	4.0	V	
Rx Output Diff Voltage	Vo	300		850	mV	
Rx Output Rise and Fall Time	Tr/Tf	30			ps	20% to 80%
Total Jitter	TJ			0.70	UI	
Deterministic Jitter	DJ			0.42	UI	

10Gbps 10km Range SFP+ Optical Transceiver

Optical Transceivers

Figure 1: Interface to Host PCB


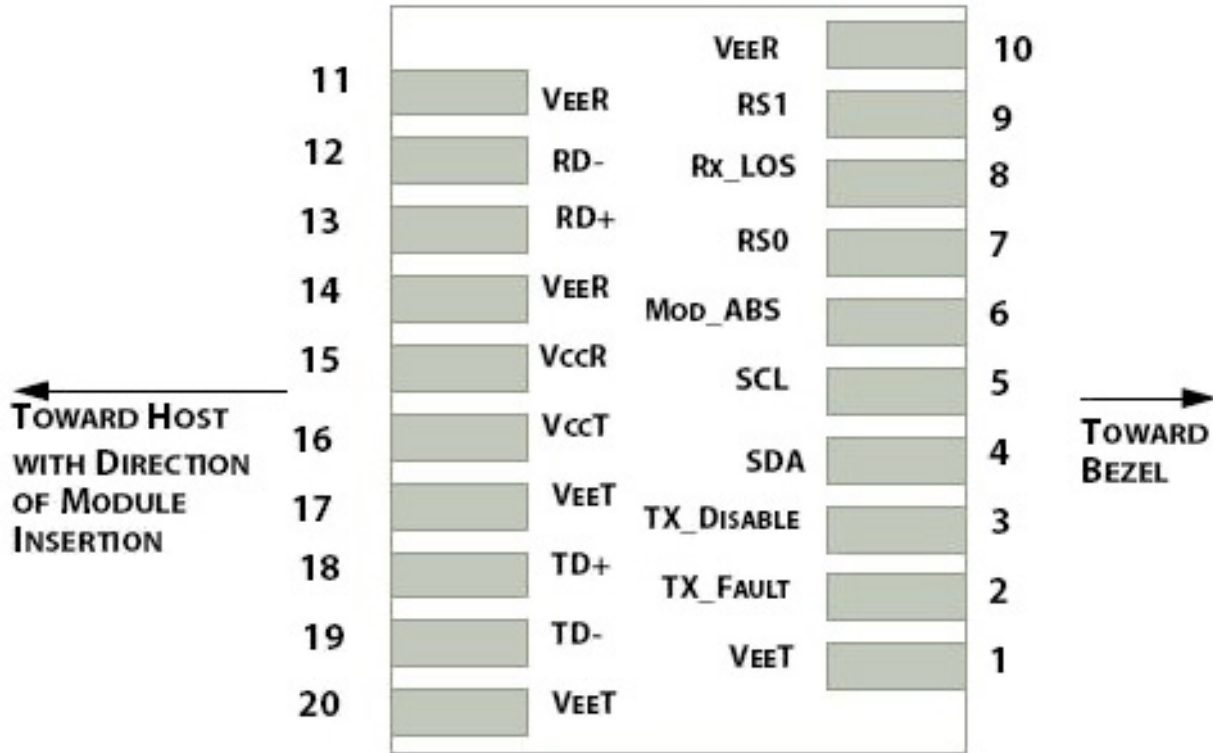


Figure 2: Module Contact Assignment

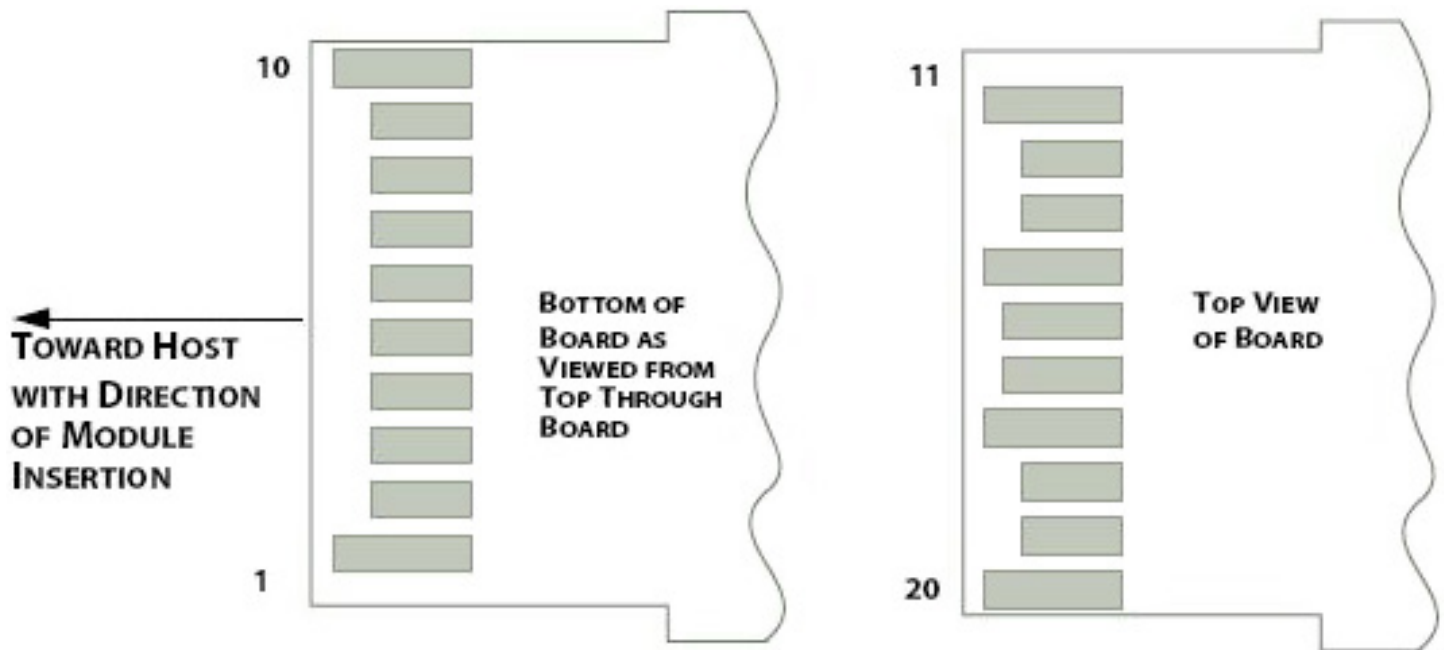

10Gbps 10km Range SFP+ Optical Transceiver

Optical Transceivers

Pin Definition

Pin	Symbol	Name/Description
1	VEET [1]	Transmitter Ground
2	Tx_FAULT [2]	Transmitter Fault
3	Tx_DIS [3]	Transmitter Disable. Laser output disabled on high or open
4	SDA [2]	2-wire Serial Interface Data Line
5	SCL [2]	2-wire Serial Interface Clock Line
6	MOD_ABS [4]	Module Absent. Grounded within the module
7	RS0 [5]	Rate Select 0
8	RX_LOS [2]	Loss of Signal Indication. Logic 0 indicates normal operation
9	RS1 [5]	Rate Select 1
10	VEER [1]	Receiver Ground
11	VEER [1]	Receiver Ground
12	RD-	Receiver Inverted DATA out. AC Coupled
13	RD+	Receiver DATA out. AC Coupled
14	VEER [1]	Receiver Ground
15	VCCR	Receiver Power Supply
16	VCCT	Transmitter Power Supply
17	VEET [1]	Transmitter Ground
18	TD+	Transmitter DATA in. AC Coupled
19	TD-	Transmitter Inverted DATA in. AC Coupled
20	VEET [1]	Transmitter Ground

Notes:

- [1] Module circuit ground is isolated from module chassis ground within the module.
- [2] Should be pulled up with 4.7k Ω - 10k Ω on host board to a voltage between 3.15V and 3.6V.
- [3] Tx_Disable is an input contact with a 4.7k Ω - 10k Ω pull up to VccT inside the module.
- [4] Mod_ABS is connected to VeeT or VeeR in the SFP+ module. The host may pull this contact up to Vcc_Host with a resistor in the range of 4.7k Ω - 10k Ω . Mod_ABS is asserted "High" when the SFP+ module is physically absent from a host slot.
- [5] RS0 and RS1 are module inputs and are pulled low to VeeT with > 30k Ω resistor in the module.

10Gbps 10km Range SFP+ Optical Transceiver

Optical Transceivers

Figure 3: Host Board Power Supply Filters Circuit


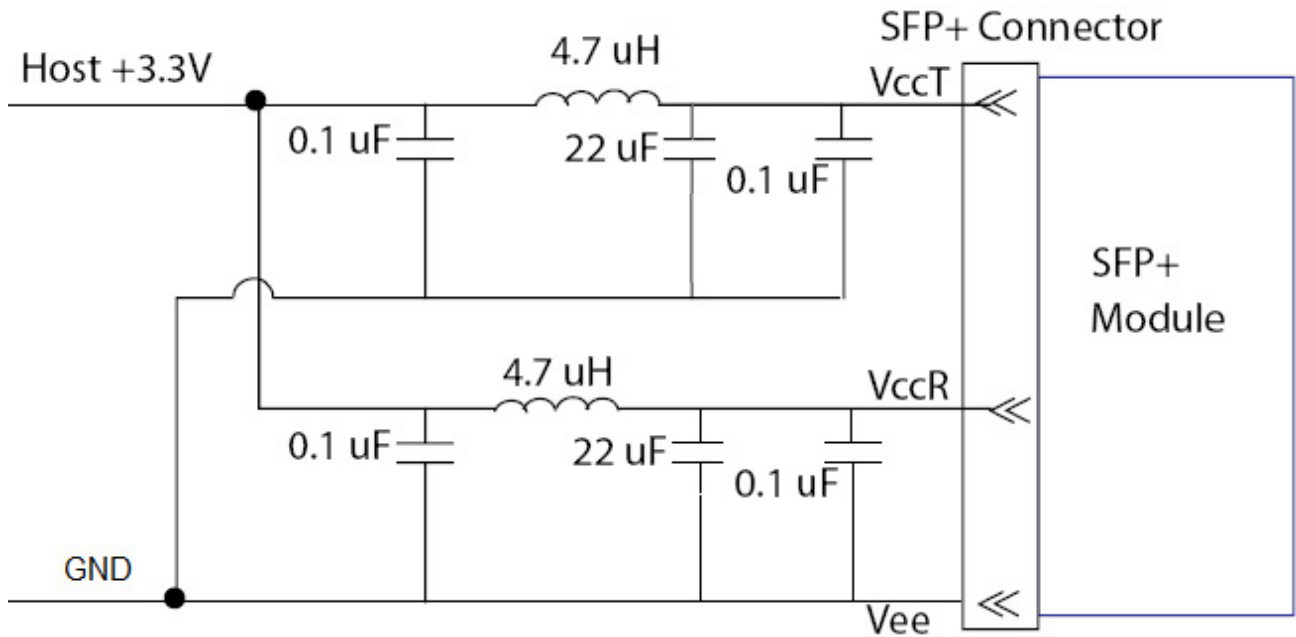



Figure 4: Host-Module Interface

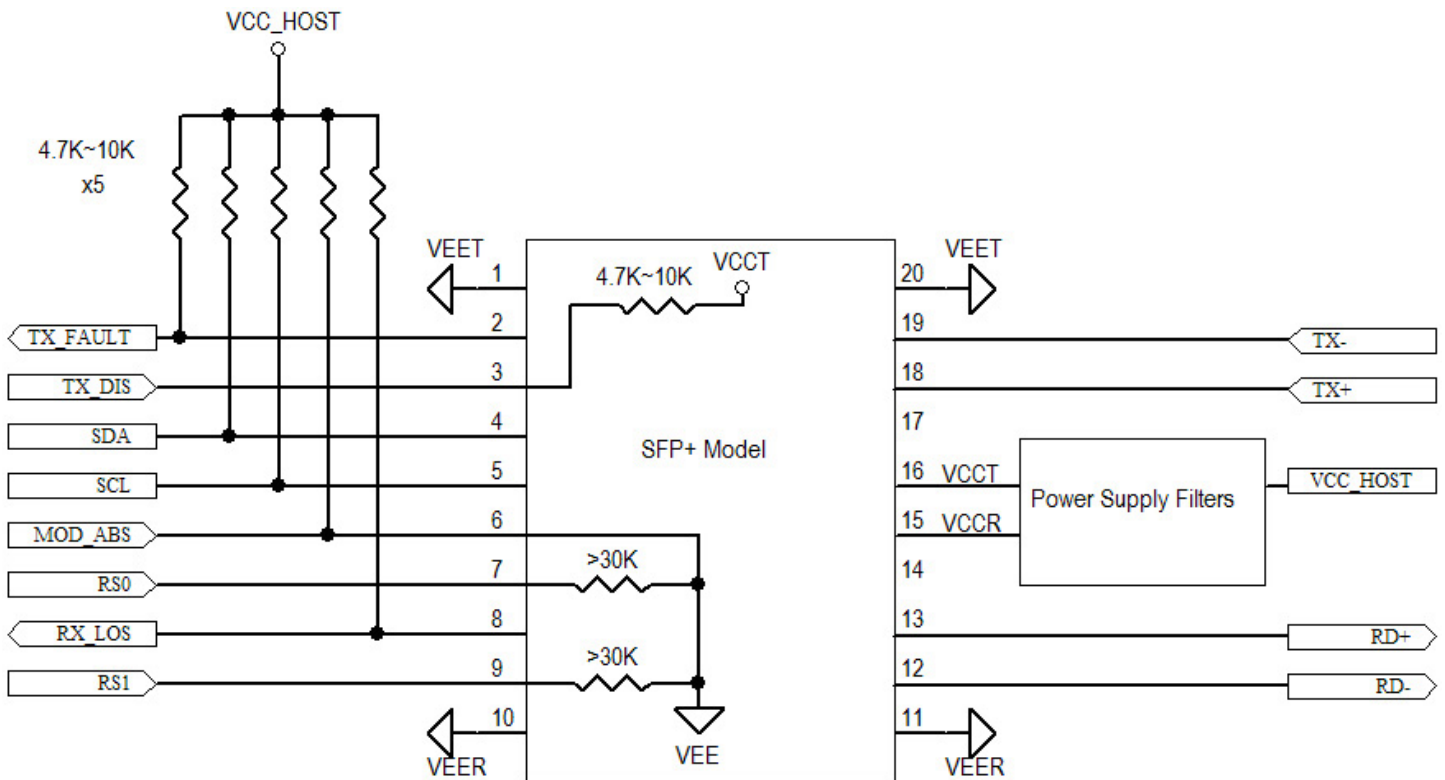

10Gbps 10km Range SFP+ Optical Transceiver

Optical Transceivers

Figure 5: Mechanical Specifications

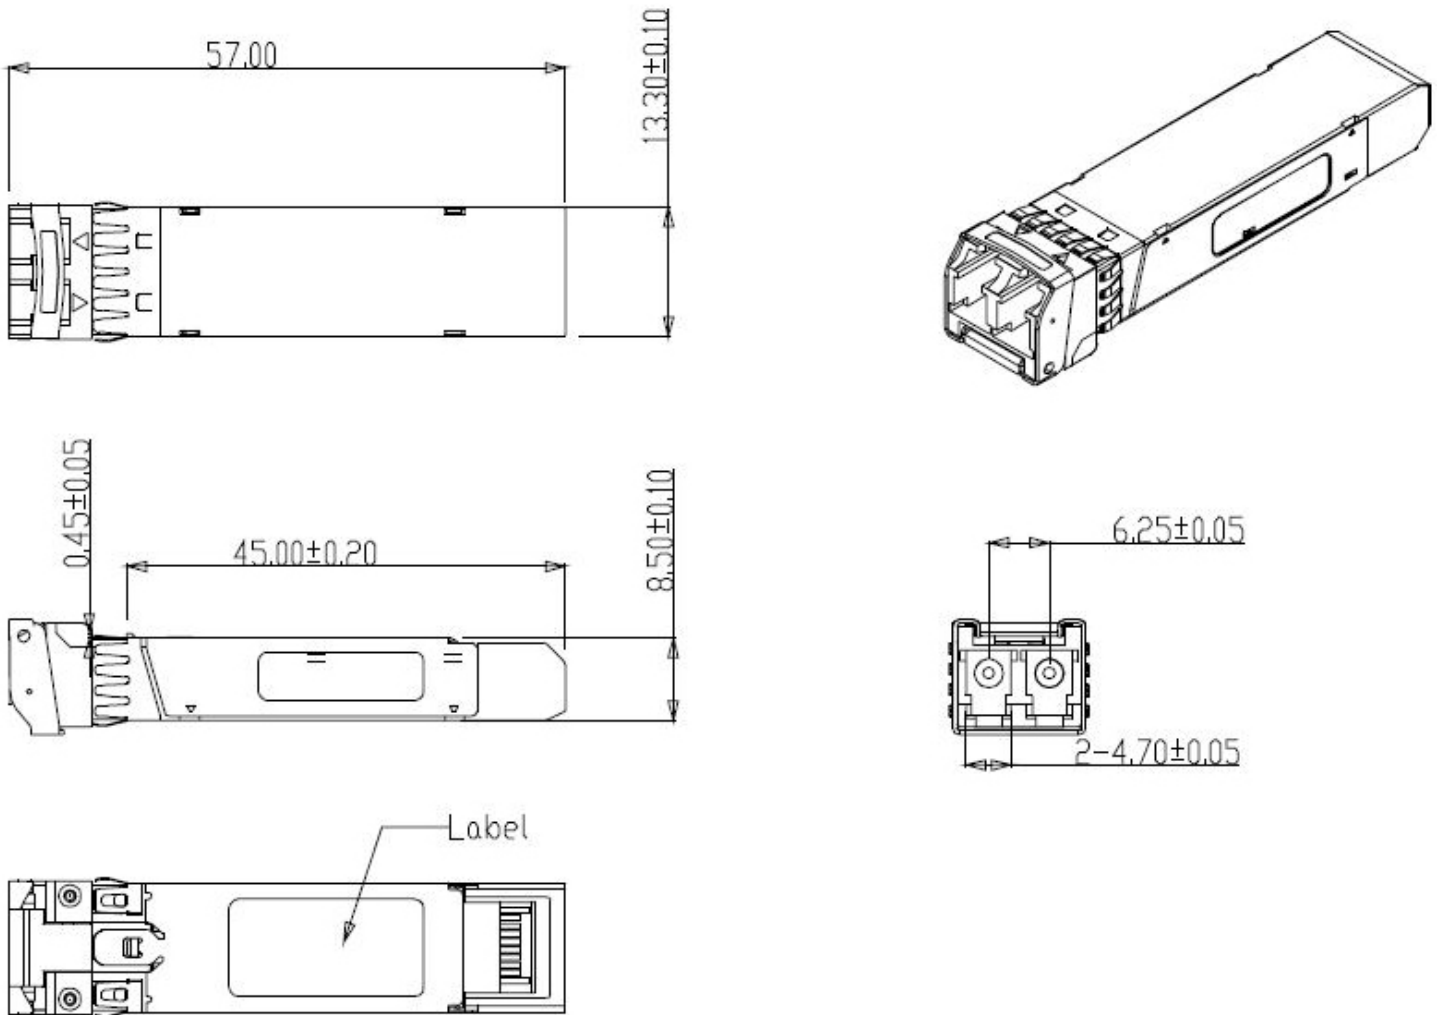

Regulatory Compliance

This SFP+ transceiver is designed to be Class I Laser safety compliant and is certified per the following standards:

Feature	Agency	Standard	Certificate/Comments
Laser Safety	FDA	CDRH 21 CFR 1040 and Laser Notice No. 50	1120292-000
Product Safety	UL	UL and CUL EN60950-2:2007	E347511
Environmental Protection	SGS	RoHS Directive 2002/95/EC	GZ1001008918/CHEM
EMC	WALTEK	EN 55022:2006+A1:2007 EN 55024:1998+A1+A2:2003	WT10093759-D-E-E

10Gbps 10km Range SFP+ Optical Transceiver

Optical Transceivers

Ordering Information

Part Number	Product Description
APP-31192-LRC	1310nm, 10Gbps, SFP+ 10km, 0°C ~ +70°C

References

1. "Specification for Enhanced Small Form Factor Pluggable Module SFP+", SFF-8431, Rev .1, July 6, 2009.
2. "Improved Pluggable Formfactor", SFF-8432, Rev 4.2, Apr 18, 2007.
3. IEEE802.3ae - 2002.
4. "Diagnostic Monitoring Interface for Optical Transceivers" SFF-8472, Rev 10.3, Dec 1, 2007.