

Network Interface Device (NID) Wallmount Enclosures


ARIA low profile, full-featured NIDs are constructed of materials capable of withstanding harsh indoor and outdoor conditions, such as UV degradation, chemical exposure, and sub-freezing temperatures.

Designed for wall mounting, the NID-4 will accommodate up to 8 fiber terminations and the NID-12 will accommodate up to 12 fiber terminations, with or without splicing.

Hinges hold the door in the open position for service and the door seal securely protects the contents from moisture and foreign matter intrusion. Cable entry ports are also sealed.

Useful for demarcation points, telecommunications rooms, and equipment rooms.

Product is UL 497 listed.

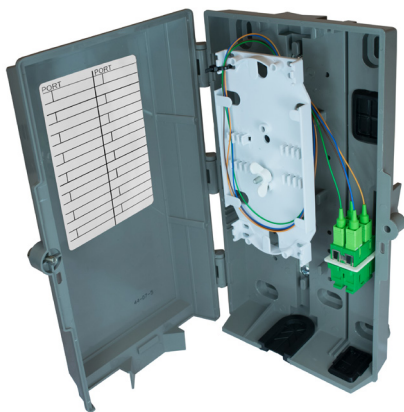

NID-4

Dimensions:

10.22"x5.64"x2.73" (HxWxD)

Capacity:

Simplex SC: 2 fibers or LC: 4 fibers

Duplex SC: 4 fibers or LC: 8 fibers



NID-12

Dimensions:

8.54"x10.00"x2.88" (HxWxD)

Capacity:

6-Pack duplex SC or LC: 12 fibers

Unique Features:

Available as a single or dual door enclosure.
Door is available with a weatherproof gasket.

Network Interface Device (NID) Wallmount Enclosures

- Compact molded splice tray (2.75" x 5.50") included
- Capable of withstanding harsh indoor and outdoor conditions
- Accommodates one 12-fiber splice tray and up to 8 or 12 terminations depending upon the model
- Flexible grommets seal cable entry ports
- Secure fit provides maximum protection from the elements and foreign matter intrusion
- Hinged lockable door allows convenient access to all components
- Unique detent/release mechanism provides easy installation and servicing by holding the door open

Part Number



1 Enclosure
04 = NID-4
12 = NID-12

2 Door Type
SS = Single Door without gasket
DS = Double Door without gasket (NID-12 Only)
SG = Single Door with gasket (NID-12 Only)
DG = Double Door with gasket (NID-12 Only)

3 Port Quantity
02 = 2 Port (SC) (NID-4 Only)
04 = 4 Port (SC/LC) (NID-4 Only)
06 = 6 Port (SC) (NID-12 Only)
08 = 8 Port (SC/LC) (SC: NID-12 Only) (LC: NID-4 Only)
12 = 12 Port (SC/LC) (NID-12 Only)

4 Adapter Type
Singlemode
SCUPC = SC/UPC
SCAPC = SC/APC
LCUPC = LC/UPC
LCAPC = LC/APC

5 Pigtail
N = No Pigtail
M = 900 μm in Mesh
D = Distribution Style (MIC)
Note: 3 meter pigtail length is standard

6 Fiber Type
Singlemode
S = SMF-28e+
B = SMF Bend Insensitive G.657.A1
Multimode
1 = 62.5/125μm
2 = 50/125μm
3 = 50/125μm OM3
4 = 50/125μm OM4

7 Splice Trays
N = None
Y = Yes*

*NID enclosures come standard with 2.9"x5.6" splice trays in a 12 fiber single fiber configuration.