


ODP Wallmount Enclosure

ARIA's ODP Wallmount Enclosure is a compact and features patch and splice capabilities.

The enclosure provides the user with separate compartments and ample bending radius guides for improved fiber management.

The unit is configurable for up to 12 fiber terminations.


It features a rugged plastic housing with separate entry points for OSP fiber and customer fiber.

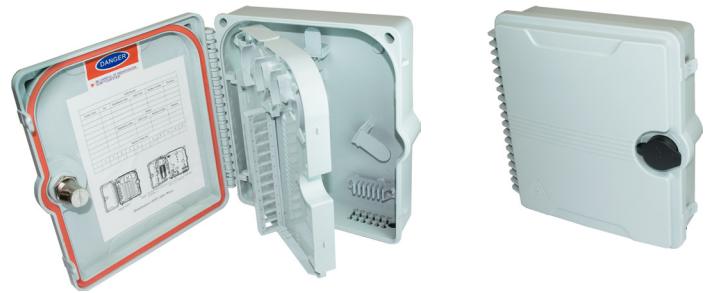


Features

- Indoor/outdoor rated for wall mounting
- Dimensions: 8.85 x 7.85 x 2.55 (H"xW"xD")
- Provides a clamping solution for feeder cable, drop cable, fiber splicing, fixation, storage, and distribution all in one
- Constructed of superior materials capable of withstanding harsh outdoor environments including: UV degradation, chemical exposure, and extreme temperatures
- Up to 12 fiber ports for OSP to customer fiber transitions
- Hinged cover fits securely on the base providing a water and dust proof seal (IP65 Rated)
- Cover closes securely with a self locking mechanism (comes with a custom key)
- The grounding device is isolated within the cabinet

Cable Routing

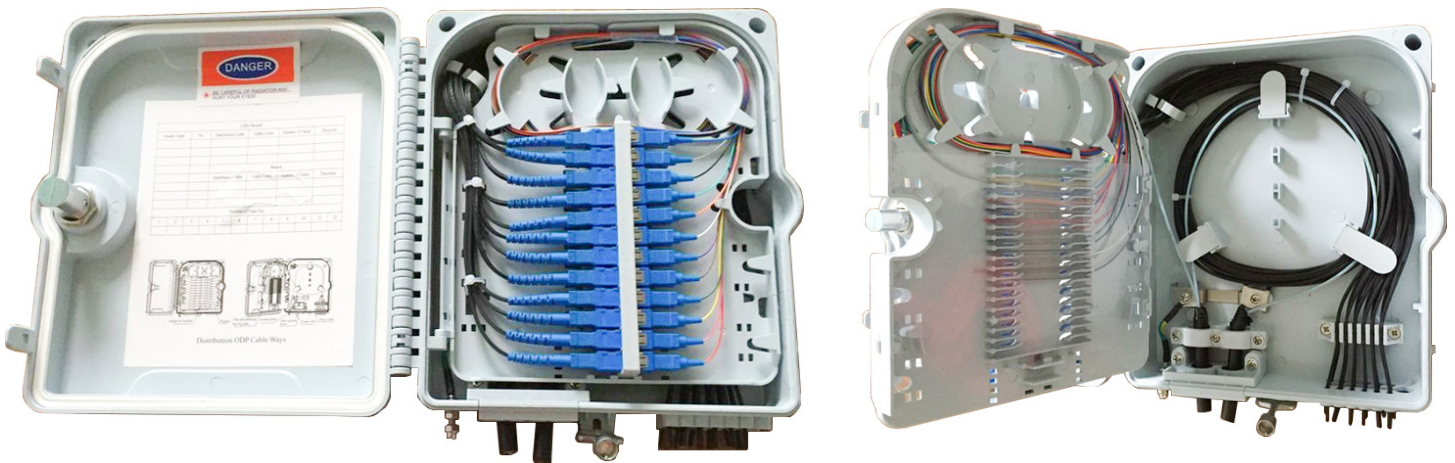

ODP Wallmount Enclosure Interior View

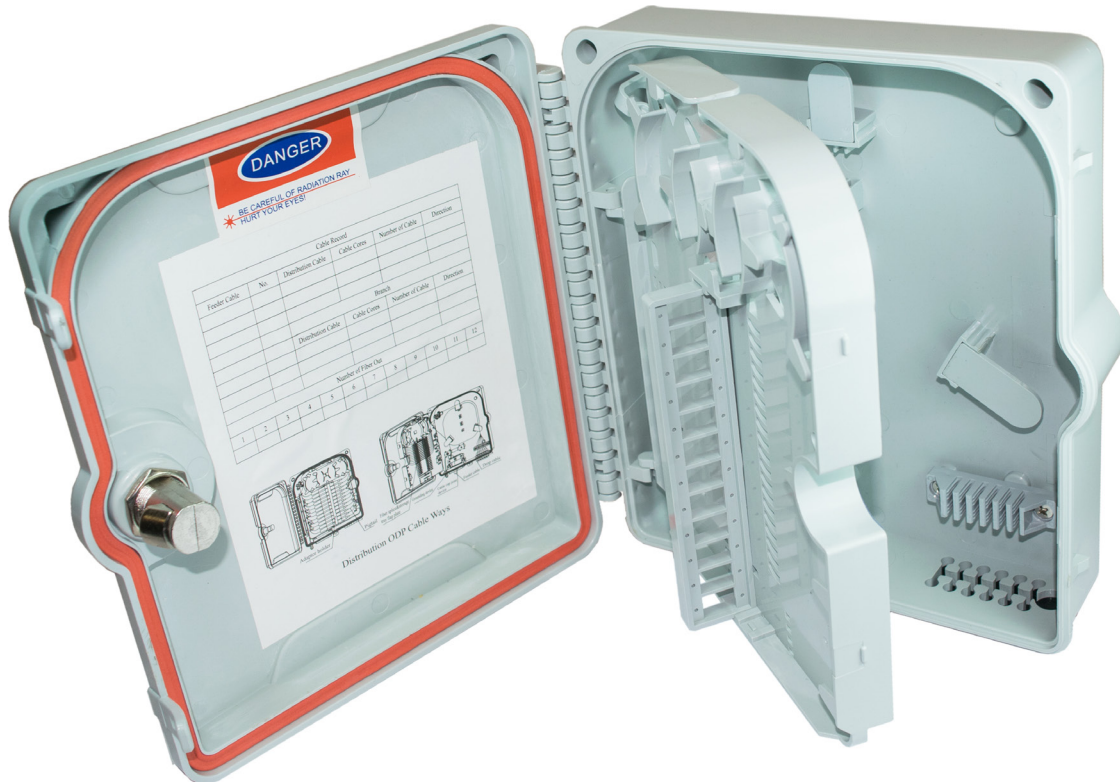

Part Number

A-ODPWM-12- 1 1 1 2 3

1 Adapter Type

Singlemode
SCU = SC/UPC
SCA = SC/APC
LCU = LC/UPC
LCA = LC/APC

Multimode
SCM = SC
LCM = LC

2 Pigtail

N = No Pigtail
M = 900 µm in Mesh
D = Distribution Style (MIC)

Note: 3 meter pigtail length is standard

3 Fiber Type

Singlemode
S = SMF-28e+
B = SMF Bend Insensitive
G.657.A1

Multimode
1 = 62.5/125µm
2 = 50/125µm
3 = 50/125µm OM3
4 = 50/125µm OM4