


XWM-4X Wallmount Enclosure

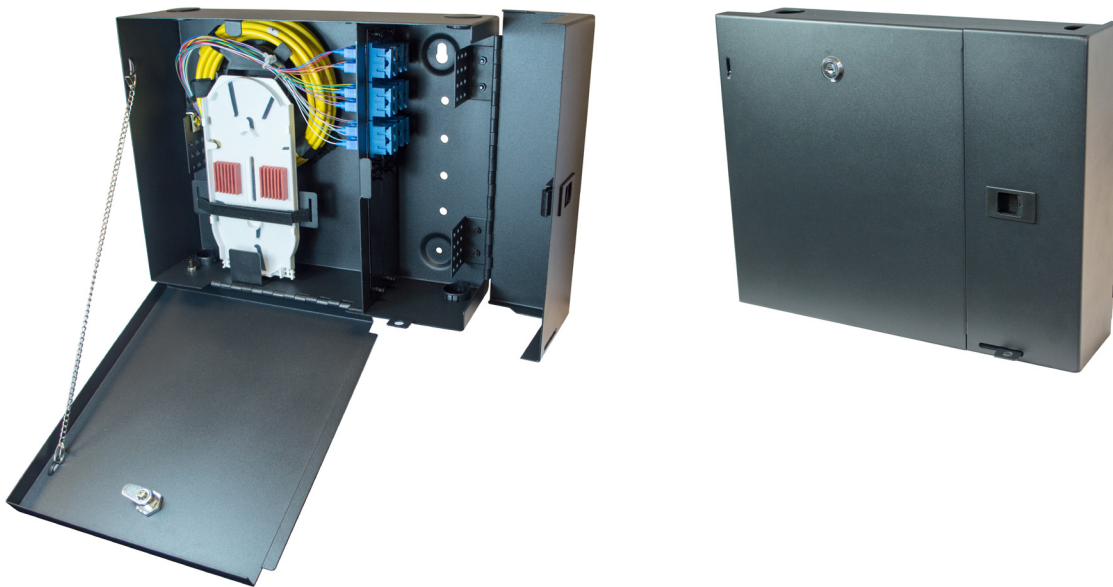

Overview

The XWM-4X is a compact wall mount fiber optic distribution enclosure designed to support patching and/or splicing.

The unit has the capacity to accept 4 LGX-type adapter plates allowing for the termination of a variety of connector types and fiber counts of up to 48 SC or 96 LC.

The unit has a key-lockable drop-down-door splice compartment which serves as a work shelf for splicing.

The patch side door comes equipped with a padlock hasp for additional security.

Specifications

Parameter	Value
Dimensions (H"xW"xD")	11.4 x 14.2 x 4.2
Weight	10 lbs
Fiber Capacity	48 fibers SC or 96 fibers LC
Cable Entry	Four 1.175" Openings
Material	16 Gauge Steel
Finish	Black electrostatically applied powder coat

Accessories



Grounding and Bonding Kit
P/N: AWMGB-KIT



Medium Compression Fitting Supports
Cable O.D.: 0.15"-0.70"
P/N: CF-MD



Three Slot Flat Drop Compression Fitting with Removable Spacers
P/N: CF-3S-FD

XWM-4X Wallmount Enclosure

Part Number



1 Adapter Plate Type
 06 = 6 Port (SC/FC/ST)
 08 = 8 Port (SC/FC/ST)
 12 = 12 Port (SC/LC/FC/ST)
 24 = 24 Port (LC)

2 Adapter Plate Quantity
 1 = 1 Plate
 2 = 2 Plates
 3 = 3 Plates
 4 = 4 Plates

3 Adapter Type
 Singlemode
 SCU = SC/UPC
 SCA = SC/APC
 LCU = LC/UPC
 LCA = LC/APC
 FCU = FC/UPC
 FCA = FC/APC
 STU = ST/UPC
 Multimode
 SCM = SC
 LCM = LC
 FCM = FC
 STM = ST

4 Pigtail
 N = No Pigtail
 M = 900 µm in Mesh
 D = Distribution Style (MIC)
 R = Ribbon in Mesh

Note: 3 meter pigtail length is standard

5 Fiber Type
 Singlemode
 S = SMF-28e+
 B = SMF Bend Insensitive G.657.A1
 Multimode
 1 = 62.5/125µm OM1
 2 = 50/125µm OM2
 3 = 50/125µm OM3
 4 = 50/125µm OM4

6 Splice Trays
 N = None
 Y = Yes*

*This enclosure comes standard with 4"x8" splice trays in 24 fiber single fiber fusion or 6 position ribbon fiber mass fusion configurations.

7 Stub Cable Type
 Leave Blank for No Stub
 Indoor
 IR = Riser Rated
 IP = Plenum Rated
 IA = Interlocking Armor Plenum Rated
 Indoor/Outdoor
 XR = Riser Rated
 XP = Plenum Rated
 XC = Central Tube Riser Rated
 Outdoor
 ON = Non-Armored
 OA = Armored Central Tube
 OL = Armored Loose Tube
 AJ = Non-Armored Alternative Jacket
 OR = Ribbon Armored Central Tube
 FD = Flat Drop

8 Stub Length
 Leave Blank for No Stub
 Add -PE for a Pulling Eye
 XXXF = XXX Feet
 XXXM = XXX Meters